



FULGOR SERVICE
SISTEMI DI AMPLIFICAZIONE

MD 100 DYNAMIC MICROPHONE

Professional dynamic microphone




Technical specifications:

- Dynamic
- Supercardioid
- Frequency 50Hz – 18.000Hz
- Sensitivity $-73\text{dB}\pm 3\text{dB}$
- Impedance 300Ω
- Magnet: neodimium
- Dimension: $\varnothing 51 \times 178$ mm
- Weight: 365 gr
- Output connector: XLRM


Accessories in the package:

- Microphone extension with XLRM/XLRF length 8mt
- Microphone stand clamp

Polar Diagram

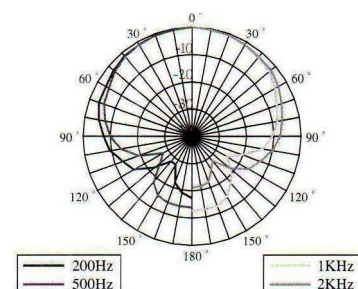

Frequency response

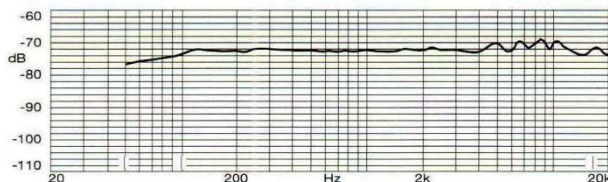

MD 100 is a robust microphone with an excellent acoustic performance, faithfully reproduces the voice making it clear and intelligible, equipped with a slide switch with soft switch.

The precision microphone for voice use is designed to offer an excellent regularity of the frequency response, which is essential in professional sound reinforcement.

The capsule's advanced anti-vibration mounting system absorbs mechanical stresses and minimizes the noises arising from handling the microphone. The steel grid and enamelled metal alloy structure resist scratches, wear and abuse.

For optimal use it is recommended to keep the microphone from a distance of 15cm from the mouth until it comes in contact with the windproof grid, aligned with the microphone.



FULGOR SERVICE

www.fulgorservice.it +39 0187 954488

Features can be changed without any notice

V2020904