




FULGOR SERVICE
SISTEMI DI AMPLIFICAZIONE

TU 108 Horn speaker high efficiency

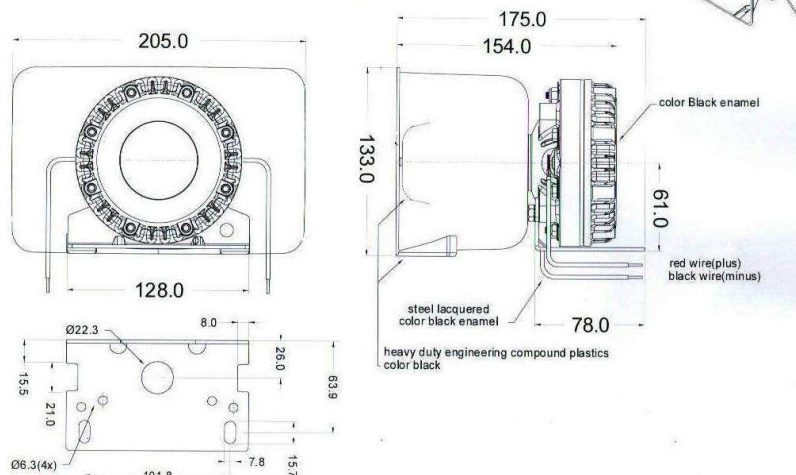

Specifications:

Rated power	100W
Impedance	8Ω
Frequency range	200–5000Hz
Distorsion	≤2%
Sound pressure level	129dB
Operating temperature	-40°C ~ 60°C
Horn	ABS
Driver	Ferrite
Dimensioni	20,5x15,4x13,3cm
Weight	2,6kg
Colour	Black
Mounting	Steel bracket
IP	IP 66

The horn speaker high efficiency TU 108 has been designed for professional use, even heavy and demanding. Thanks to its powerful driver and its structure, it has a sound acoustic pressure of 129dB; the very small total size allows an easy installation.

Body in ABS, driver in ferrite, steel bracket, IP 66: all this makes TU 108 suitable for installation on civil vehicles, industrial vehicles and rescue/emergency vehicles, both terrestrial and marine.

TU 108 is suitable for sonorizing large environments, also very noisy; it can be used to launch "safety messages", as multitone siren or to boost voice signals.

V122015

Le caratteristiche possono essere cambiate senza preavviso

1